

FORM PTO 1390  
(REV 5-93)

US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY DOCKET NO.  
2000-1416ATRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 USC 371U.S. APPLICATION NO.  
(if known, see 37 CFR 1.55)  
[NEW] **09/673518**International Application No.  
PCT/JP00/00843International Filing Date  
February 16, 2000Priority Date Claimed  
February 17, 1999

## Title of Invention

DIGITAL DATA RECORDING/REPRODUCTION METHOD, AND DIGITAL DATA RECORDING/REPRODUCTION  
APPARATUSApplicant(s) For DO/EO/US  
Masayuki TAKAHASHI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. ☒ This is an express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 USC 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau per PCT/IB/308. **ATTACHMENT A**
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 USC 371(c)(2)). **ATTACHMENT B**
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3)).
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
9. ☒ An **unexecuted** oath or declaration of the inventor(s) (35 USC 371(c)(4)). **ATTACHMENT C**
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

## Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 w/International Search Report. **ATTACHMENT D**
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment. **ATTACHMENT E**  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:  
 Notification Concerning Submission or Transmittal of Priority Document (Form PCT/IB/304) - **ATTACHMENT F**

U.S. APPLICATION NO. (if known, see 37 CFR 1.61) [NEW] <b>09/673518</b>		INTERNATIONAL APPLICATION NO. PCT/JP00/00843		ATTORNEY DOCKET NO. 2000-1416A	
17. [X] The following fees are submitted  <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b>  [X] Search Report has been prepared by the EPO or JPO ..... \$860.00 [ ] International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... \$690.00 [ ] No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$710.00 [ ] Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1000.00 [ ] International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-33(4) ..... \$100.00  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				CALCULATIONS	PTO USE ONLY
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).					
Claims	Number Filed	Number Extra	Rate		
Total Claims	15 - 20 =	0	X \$18.00		
Independent Claims	5 - 3 =	2	X \$80.00	\$160.00	
Multiple dependent claim(s) (if applicable)			+ \$270.00		
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,020.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)				-	
<b>SUBTOTAL =</b>				\$1,020.00	
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+	
<b>TOTAL NATIONAL FEE =</b>				\$1,020.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (\$40 per property).				+	
<b>TOTAL FEES ENCLOSED =</b>				\$1,020.00	
				Amount to be refunded:	\$
				charged:	\$

- a. [X] A check in the amount of \$1,020.00 to cover the above fees is enclosed.
- b. [ ] Please charge my Deposit Account No. 23-0975 in the amount of \$\_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-0975. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

WENDEROTH, LIND & PONACK  
2033 K St., N.W., Suite 800  
Washington, D.C. 20006

Telephone: (202) 721-8200

Facsimile: (202) 721-8250

09/673518  
528 Rec'd PCT/PTO 17 OCT 2000

THE COMMISSIONER IS AUTHORIZED  
TO CHARGE ANY DEFICIENCY IN THE  
FEE FOR THIS PAPER TO DEPOSIT  
ACCOUNT NO. 23-0975.

By 

Nils E. Pedersen  
Registration No. 33,145

October 17, 2000  
NEP/pjm

Check No. 40318

2000-1416A

09/673518

528 Rec'd PCT/PTO 17 OCT 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :  
Masayuki TAKAHASHI : Attn: BOX PCT  
Serial No. [NEW] : Docket No. 2000-1416A  
Filed October 17, 2000 :  
DIGITAL DATA RECORDING/ :  
REPRODUCTION METHOD, AND :  
DIGITAL DATA RECORDING/ :  
REPRODUCTION APPARATUS :  
[Corresponding to PCT/JP00/00843  
Filed February 16, 2000]

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

Kindly amend the above-identified application as follows:

IN THE CLAIMS:

Claim 11, line 1, change "any of Claims" to --Claim-- and delete "to 10".

Add the following new claims:

- 13. A digital data recording/reproduction apparatus as defined in Claim 8, further comprising:
- a digital broadcast receiver for receiving a digital broadcast; and
  - a controller for controlling the file structure management unit, according to accounting information which indicates whether the received digital broadcast is a fee-charged one or not;

ATTACHMENT E

wherein, when an abend of data recording occurs during reception of a fee-charged digital broadcast, the controller discards the recorded data after recovery from the abend so that accounting is not performed on the digital broadcast.

14. A digital data recording/reproduction apparatus as defined in Claim 9, further comprising:

a digital broadcast receiver for receiving a digital broadcast; and

a controller for controlling the file structure management unit, according to accounting information which indicates whether the received digital broadcast is a fee-charged one or not;

wherein, when an abend of data recording occurs during reception of a fee-charged digital broadcast, the controller discards the recorded data after recovery from the abend so that accounting is not performed on the digital broadcast.

15. A digital data recording/reproduction apparatus as defined in Claim 10, further comprising:

a digital broadcast receiver for receiving a digital broadcast; and

a controller for controlling the file structure management unit, according to accounting information which indicates whether the received digital broadcast is a fee-charged one or not;

wherein, when an abend of data recording occurs during reception of a fee-charged digital broadcast, the controller discards the recorded data after recovery from the abend so that accounting is not performed on the digital broadcast. --

**REMARKS**

The present Preliminary Amendment is submitted to delete the multiple dependency of claim 11, thereby reducing the required PTO filing fee.

Respectfully submitted,

Masayuki TAKAHASHI

By



Nils E. Pedersen  
Registration No. 33,145  
Attorney for Applicant

NEP/pjm  
Washington, D.C.  
Telephone (202) 721-8200  
Facsimile (202) 721-8250  
October 17, 2000

18/PRTS

1

09/673518  
528 Rec'd PCT/PTO 17 OCT 2000

## DESCRIPTION

### DIGITAL DATA RECORDING/REPRODUCTION METHOD, AND DIGITAL DATA RECORDING/REPRODUCTION APPARATUS

#### TECHNICAL FIELD

The present invention relates to methods and apparatuses for recording and reproducing digital data in/from disk recording media and, more particularly, to a digital data recording/reproduction method for preventing destruction of file and loss of data when an abend such as a power failure occurs, and a digital data recording/reproduction apparatus using the digital data recording/reproduction method.

#### BACKGROUND ART

As a conventional method for preventing destruction of file and loss of data which occur during a power failure, Japanese Published Patent Application No. Hei.8-255001 discloses a method using an uninterruptable power supply (UPS) which can temporarily supply power during a power failure.

Hereinafter, the structure and operation of a conventional UPS system will be described with reference to figure 16.

Figure 16 is a diagram illustrating the structure of the conventional UPS system.

The conventional UPS system comprises an I/O unit 1302 for

inputting and outputting data; a control PC (personal computer) 1301 for receiving an output signal from the I/O unit 1302, and outputting a control signal for process control to the I/O unit 1302; a UPS 1304 for temporarily supplying power when a power failure occurs; and an operation check circuit 1303 for receiving a commercial power supply break signal from the UPS 1304, which indicates the state of power failure of a commercial power supply, and deciding that a power failure occurs, when this commercial power supply break signal continues for longer than a predetermined time.

On receipt of the signal from the operation check circuit 1303 informing that a power failure occurs, the control PC 1301 closes the active file. Further, the operation check circuit monitors the power supply voltage, and when something abnormal occurs, it automatically reports the abnormality by using a telephone-line automatic report unit 1305.

As described above, according to the conventional UPS system, since the control PC 1301 can close the active file even when a power failure occurs, destruction of the active file or loss of data hardly occurs during the power failure.

By the way, there are tape media typified by VCR as recording media of digital data recording/reproduction apparatuses intended for home use. In recent years, instead of the tape media, random-accessible disk recording media, such as magnetic disks and optical magnetic disks, have been used.



When a power failure occurs during recording of data on the conventional tape medium, video data up to the power failure is stored in the medium. However, in the case of a disk recording medium constituted for use in a computer, all of video data which have been recorded from the start of recording to the power failure are lost unless the recording end process is correctly performed.

Hereinafter, a description will be given of the reason why destruction of file or loss of data occurs when a power failure occurs during data recording on a disk recording medium constructed for used in a computer, with reference to figure 17.

Figure 17 shows a file structure in a recording area of a disk recording medium, which is employed in an OS of a computer, such as MS-windows (produced by Microsoft).

The recording area of the disk recording medium is composed of a root directory 1401, a file allocation table 1402, and clusters 1403.

The root directory 1401 holds the title of each file stored in the disk recording medium, and the head cluster number of the file. The file allocation table 1402 holds connection information of the clusters 1403 by which the file is constituted. The clusters 1403 are the smallest units of data recording/reproduction on/from the disk recording medium, and hold actual data.

In the example of figure 17, the root directory 1401

When recording data, initially, the file name and the head cluster number are entered in the root directory 1401, and the actual data is recorded in the respective clusters 1403 while updating the connection information of the clusters 1403 in the file allocation table 1402.

At the time of data recording, when the cluster connection information and the actual data are written in the file allocation table 1402 and in each area of the cluster 1403, respectively, the cluster connection information in the file allocation table 1402 must be updated every time the data is written in the cluster 1403. So, there arises a need to seek the write head onto the disk recording medium, whereby the write

speed is considerably decreased.

In order to solve this problem, there is adopted a method in which data is written in the cluster 1403 while updating the information of the file allocation table 1402 in a memory, and the information of the file allocation table 1402 is reflected onto the disk recording medium when the data recording is ended, i.e., when the file is closed.

In the above-described data recording in the disk recording medium, however, if a power failure occurs before the recording end process is executed, since the file allocation table 1402 in the disk recording medium is not updated yet, the cluster connection information on the file allocation table 1402 is lost although data has been recorded in the clusters 1403 from the start of recording to the power failure, resulting in destruction of file and loss of data.

Further, the use of the conventional UPS as a countermeasure against loss of data increases the price of the digital data recording/reproduction apparatus for home use.

The present invention is made to solve the above-described problems, and it is an object of the present invention to provide inexpensive method and apparatus for digital data recording/reproduction, which prevent destruction of file and loss of data when an abend, such as a power failure, occurs during data recording.

## DISCLOSURE OF THE INVENTION

According to Claim 1 of the present invention, there is provided a digital data recording/reproduction method for recording and reproducing digital data in units of clusters, each cluster being the smallest unit of data recording on a disk recording medium. This method comprises: a first step of constructing a file structure in which recordable clusters are connected, on the disk recording medium; a second step of recording digital data from the head of the recordable clusters; and a third step of constituting, as a recorded file, the digital data from a recording head cluster to a recording end cluster.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the area where the digital data is recorded exists as a part of file when power is restored, and the data which has been recorded from the start of recording to the abend can be reproduced after recovery from the abend. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 2 of the present invention, the digital data recording/reproduction method defined in Claim 1 further comprises the steps of: when an abend occurs during data recording in the second step, detecting the abend of data recording after recovery from the abend; and constituting, as a recorded file, the digital data which has been recorded from the start of data recording to the abend, on the basis of format

00673518 130600

information of the digital data.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be reproduced when power is restored and, furthermore, the recordable area can be restored as a recorded file identical to a file obtained when data recording is normally ended. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 3 of the present invention, in the digital data recording/reproduction method defined in Claim 2, the format information of the digital data is a sync byte of a transport packet.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be reproduced upon restoration of power and, furthermore, the recordable area can be restored as a recorded file identical to a file obtained when data recording is normally ended. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 4 of the present invention, in the digital data recording/reproduction method defined in Claim 2, the format information of the digital data is time information.

Therefore, even if an abend such as a power failure occurs

005027 BT 5/2/80

during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be reproduced upon restoration of power and, furthermore, the recordable area can be restored as a recorded file identical to a file obtained when data recording is normally ended. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 5 of the present invention, there is provided a digital data recording/reproduction method for recording and reproducing digital data in units of clusters, each cluster being the smallest unit of data recording on a digital recording medium. This method comprises the steps of: recording digital data in the clusters, with a file identifier and cluster connection information being added to the digital data; when an abend occurs during data recording, detecting the abend of data recording after recovery from the abend; and restoring the cluster connection information on the basis of the file identifier and the cluster connection information which are recorded in the clusters.

Therefore, even if an abend occurs during recording of digital data, the file allocation table of the data file which has been recorded from the start of recording to the abend can be restored when power is restored, whereby the reproducible area can be restored in a file format. Accordingly, destruction of file and loss of data, which are attendant on an abend, can be

avoided inexpensively.

According to Claim 6 of the present invention, there is provided a digital data recording/reproduction apparatus comprising: a disk recording medium in which digital data is stored in units of clusters, each cluster being the smallest unit of data recording; and a file structure management unit for storing the digital data in the disk recording medium or reading the digital data from the disk recording medium. The disk recording medium has a file structure in which all of clusters are connected in advance.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the area where the digital data is recorded exists as a part of a file when power is restored and, therefore, the data which has been recorded from the start of recording to the abend can be reproduced after recovery from the abend. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 7 of the present invention, in the digital data recording/reproduction apparatus defined in Claim 6, the file structure management unit has a file recovery unit, and when an abend occurs during recording of digital data, the file recovery unit constitutes, as recorded data, the digital data which has been recorded from the start of data recording to the abend, on the basis of format information of the digital data, after recovery from the abend.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be reproduced upon restoration of power and, furthermore, the recordable area can be restored as a recorded file identical to a file obtained when data recording is normally ended. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 8 of the present invention, in the digital data recording/reproduction apparatus defined in Claim 7, the format information is a sync byte of a transport packet.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be reproduced upon restoration of power and, furthermore, the recordable area can be restored as a recorded file identical to a file obtained when data recording is normally ended. As a result, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 9 of the present invention, in the digital data recording/reproduction apparatus defined in Claim 7, the format information is time information.

Therefore, even if an abend such as a power failure occurs during recording of digital data, the digital data which has been recorded from the start of recording to the abend can be



According to Claim 10 of the present invention, a digital data recording/reproduction apparatus comprising: a disk recording medium in which digital data is stored in units of clusters, each cluster being the smallest unit of data recording; and a file structure management unit for storing digital data in the clusters of the disk recording medium, with a file identifier and cluster connection information being added to the clusters, or reading the digital data from the disk recording medium. The file structure management unit has a file recovery unit, and when an abend occurs during recording of digital data, the file recovery unit constitutes, as recorded data, the digital data which has been recorded from the start of data recording to the abend, on the basis of the file identifier and the cluster connection information which are recorded in the clusters, after recovery from the abend.

Therefore, even if an abend occurs during recording of digital data, the file allocation table of the data file which has been recorded from the start of recording to the abend can be restored when power is restored, whereby the reproducible area can be restored in a file format. Accordingly, destruction of

file and loss of data, which are attendant on an abend, can be avoided inexpensively.

According to Claim 11 of the present invention, the digital data recording/reproduction apparatus defined in any of Claims 7 to 10 further comprises: a digital broadcast receiver for receiving a digital broadcast; and a controller for controlling the file structure management unit, according to accounting information which indicates whether the received digital broadcast is a fee-charged one or not. When an abend of data recording occurs during reception of a fee-charged digital broadcast, the controller discards the recorded data after recovery from the abend so that accounting is not performed on the digital broadcast.

Therefore, even when an abend such as a power failure occurs during data recording, the file until interruption due to the abend can be restored if the digital broadcast is free of charge. Further, when the digital broadcast whose recording is interrupted due to the abend is a fee-charge one, no accounting is performed on this broadcast by discarding the data which has been recorded until the interruption. In this way, appropriate accounting for the user is carried out.

According to Claim 12 of the present invention, a digital data recording/reproduction apparatus for recording and reproducing digital data, comprises: a plurality of disk storage units in which digital data are recorded; and a file structure

0090907 00000000

management unit for recording a cluster in which digital data is stored and a file allocation table for managing information about connection of the cluster, in different disk storage units.

Therefore, high-speed disk access is achieved, and even if an abend such as a power failure occurs during recording of digital data, the data which has been recorded from the start of recording to the abend can be read in a normal file format when power is restored. Accordingly, destruction of file and loss of data, which are attendant on an abend, can be avoided inexpensively.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating the structure of a digital data recording/reproduction apparatus according to a first embodiment of the present invention.

Figure 2(a) is a diagram illustrating a file structure of a disk recording medium when no data is recorded in it, according to the first embodiment of the invention.

Figure 2(b) is a diagram illustrating the file structure of the disk recording medium when data is being recorded in it, according to the first embodiment of the invention.

Figure 2(c) is a diagram illustrating the file structure of the disk recording medium when data recording is ended, according to the first embodiment of the invention.

Figure 3 is a flowchart illustrating a digital data

recording/reproduction method according to the first embodiment of the invention.

Figure 4 is a block diagram illustrating the structure of a digital data recording/reproduction apparatus according to a second embodiment of the invention.

Figure 5 is a diagram illustrating the structure of a transport packet according to the second embodiment of the invention.

Figure 6 is a flow chart illustrating the file recovery process upon restoration of power, according to the second embodiment of the invention.

Figure 7 is a diagram for explaining the data format of PES data according to a third embodiment of the invention.

Figure 8 is a flowchart illustrating the file recovery process upon restoration of power according to the third embodiment of the invention.

Figure 9 is a diagram illustrating a file structure of a disk recording medium according to a fourth embodiment of the invention.

Figure 10 is a diagram illustrating the data structure of a cluster according to the fourth embodiment of the invention.

Figure 11(a) is a diagram illustrating the file structure when an abend such as a power failure occurs, according to the fourth embodiment of the invention.

Figure 11(b) is a diagram illustrating the state of the

cluster when an abend such as a power failure occurs, according to the fourth embodiment of the invention.

Figure 12 is a flowchart illustrating the file recovery process upon restoration of power, according to the fourth embodiment of the invention.

Figure 13(a) is a diagram illustrating the structure of a digital data recording/reproduction apparatus according to a fifth embodiment of the invention.

Figure 13(b) is a diagram illustrating fee-charged broadcast accounting information according to the fifth embodiment of the invention.

Figure 14 is a flowchart illustrating the process of controlling digital data recording/reproduction according to the fifth embodiment of the invention.

Figure 15 is a block diagram illustrating the structure of a digital data recording/reproduction apparatus according to a sixth embodiment of the invention.

Figure 16 is a diagram illustrating the structure of the conventional UPS system.

Figure 17 is a diagram illustrating the conventional file structure.

BEST MODE TO EXECUTE THE INVENTION

#### **Embodiment 1.**

Hereinafter, a method and an apparatus for recording/

reproducing digital data according to a first embodiment of the present invention will be described with reference to the drawings. In the digital data recording/reproduction method according to this first embodiment, a recordable area in which recordable clusters are connected is constructed on a disk recording medium in advance of recording, and digital data from a recording head cluster to a recording end cluster are constructed as a recorded file when recording is ended.

Figure 1 is a block diagram illustrating the structure of a digital data recording/reproduction apparatus 20 according to the first embodiment of the present invention.

The digital data recording/reproduction apparatus 20 comprises a data I/O unit 21, a file structure management unit 22, and a disk recording medium 23.

When receiving data, the data I/O unit 21 receives digital data from an externally-connected digital data input device, and outputs the digital data to the file structure management unit 22. When reproducing data, the data I/O unit 21 receives digital data from the file structure management unit 22, and outputs the digital data to an externally-connected digital data reproduction device.

The file structure management unit 22 manages the file structure of the disk recording medium 23, and records the digital data in the disk recording medium 23 when receiving the data, and reads the digital data from the disk recording medium

23 when outputting the data.

The disk recording medium 23 is a disk type recording medium in which digital data is stored.

Figures 2(a) to 2(c) are diagrams illustrating the file structure of the disk recording medium 23.

In figures 2(a) to 2(c), the file structure of the disk recording medium 23 is composed of a root directory 101, a file allocation table 102, and clusters 103.

The root director 101 holds the head cluster number of the recordable area, the title of a data file recorded, and the head luster number where the data of the data file is stored. The file allocation table 102 manages the connection of the clusters 103 in the data file by storing, in the position of the current cluster number, a cluster number which follows the current cluster number. Each cluster 103 is the smallest access unit of the disk recording medium 23, and continuous numbers are assigned as logical block addresses to the respective clusters 103. The digital data of the data file is stored in the clusters 103.

Figure 2(a) shows the file structure when data is not recorded yet.

With reference to figure 2(a), in the root directory 101, no recorded data file exists, and "Free Area" indicating a recordable area exists. The Free Area starts from the cluster number 0002. In the file allocation table 102, FFFF means that no cluster follows the current cluster, i.e., it means the final

cluster.

In the file structure when data is not recorded yet, the file allocation table 102 is constituted such that the Free Area is constituted by all clusters connected successively, starting from the cluster number 0002.

Next, the data recording operation will be described with reference to figures 1, 2(a)-2(c), and 3.

Figure 3 is a flowchart illustrating the digital data recording/reproduction method.

Initially, when the disk recording medium 23 is formatted or before recording is started, the file structure management unit 22 constructs the recording area of the disk recording medium 23 such that the recording area has a file structure in which all of the cluster numbers are continuous as shown in figure 2(a) (step S31). After constructing the file structure, data recording is started.

Digital data is supplied from an externally-connected digital data input device (not shown) to the data I/O unit 21. The data I/O unit 21 outputs the digital data to the file structure management unit 22.

Figure 2(b) shows the file structure when data recording is started.

In figure 2(b), when data recording is started, the file structure management unit 22 copies the head cluster number assigned to the Free Area of the root directory 101, in the head

009021 89673518 120600



Since the root directory 101 is altered, the construction of the file allocation table 102 is altered such that the data file Video shows the area where all of the clusters are connected successively, starting from the cluster number 0002.

Figure 2(c) shows the file structure when data recording is ended.

Then, in the root directory 101, a cluster number following the most-recently recorded cluster 103 (in this case, 2000) is stored in the head cluster number storage area of the data in the Free Area indicating the recordable area.

Thereby, an area starting from the head cluster assigned to the Free Area indicating the recordable area is used when the next data file is recorded. In this way, the digital data from

the recording head cluster to the recording end cluster are constituted as a recorded file (step S33).

If an abend such as a power failure occurs during data recording in the above-described file structure (e.g., if an abend occurs when the cluster number 1FFF is being written), the file structure is in the state of figure 2(b), and the data file is in the state where the already recorded clusters from the cluster number 0002 to the cluster number 1FFF are connected to the unrecorded clusters 2000 and onward.

As described above, the method and apparatus for recording/reproducing digital data according to the first embodiment use the disk recording medium 23 having the file structure in which all of the clusters in the recordable area are connected in advance, and include the file structure management 22 which stores, when recording is ended, an identifier indicating the final cluster in the cluster where data has been recorded most recently, and stores the cluster number following the most-recently recorded cluster in the head cluster of the recordable area. Therefore, even when an abend such as a power failure occurs during recording of digital data, the area where the digital data has been recorded exists as a part of the file when power is restored, whereby the data which has been recorded from the start of recording to the abend can be reproduced after the apparatus is recovered from the abend.

While in this first embodiment FFFF is used as an identifier

indicating that no recordable area exists, any other value may be used so long as it is not used as a cluster number.

#### **Embodiment 2.**

Hereinafter, a method and an apparatus for recording/reproducing digital data according to a second embodiment of the present invention will be described with reference to the drawings.

In the digital data recording/reproduction method according to this second embodiment, the procedure according to the first embodiment further includes a step of checking whether there is any dropout of synchronous byte in the cluster data to obtain the head cluster number of the interrupted file.

The file structure of the disk recording medium according to this second embodiment is identical to that of the first embodiment shown in figures 2(a) to 2(c). In this second embodiment, FFFF, which is stored in the head cluster number storage area of the Free Area indicating the recordable area in figure 2(b), indicates that data recording is continued.

Figure 4 is a block diagram illustrating the structure of a digital data recording/reproduction apparatus 24 according to the second embodiment.

The digital data recording/reproduction apparatus 24 comprises a data I/O unit 21, a file structure management unit 25, and a disk recording medium 23. The file structure management unit 25 further includes a file recovery unit 26. The

The file structure management unit 25 manages the file structure of the disk recording medium 23, and records digital data in the disk recording medium 23 when receiving the data, and reads the digital data from the disk recording medium 23 when outputting the data.

Figure 5 is a diagram illustrating the structure of a transport packet which is a data format of digital broadcasting.

Next, a description will be given of the file recovery process upon restoration of power, in the case where an abend

Figure 6 is a flowchart illustrating the file recovery process upon restoration of power. This process is performed by the file recovery unit 26 unless otherwise specified.

In step S302, the head cluster number of the recording-interrupted file, whose connection on the file allocation table 102 is not concluded by the final cluster (FFFF), is obtained as a current cluster from the root directory 101.

In step S303, it is checked whether there is a dropout of sync byte 203 in the current cluster. When there is a dropout of sync byte 203, it is decided that recording is interrupted in the current cluster, followed by step S304. When there is no dropout of sync byte 203, it is decided that recording is not interrupted

in the current cluster, followed by step S307.

In step S304, FFFF indicating the final cluster is stored in the position of the cluster number corresponding to the current cluster on the file allocation table 102.

In step S305, the cluster number following the current cluster is obtained as a head free cluster from the file allocation table 102.

In step S306, the head free cluster is stored in the head cluster number storage area of the Free Area in the root directory 101. Then, the power restoration process is ended.

In step S307, it is checked whether there is a cluster following the current cluster. When there is a cluster following the current cluster, the operation proceeds to step S308. When there is no cluster following the current cluster, it is decided that recording has been performed up to the final cluster, and the power restoration process is ended.

In step S308, the cluster number following the current cluster is obtained from the file allocation table 102, and the current cluster is replaced with this cluster number to update the current cluster. Then, the file recovery unit 26 returns to step S303 to repeat the process of checking the sync byte 203.

Next, the file recovery process upon restoration of power will be described using an example.

It is assumed that a power failure occurs during recording of data in the cluster 103 having the cluster number 1FFF. In

00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

this case, when the file recovery unit 26 checks whether there is a dropout of sync byte 203, starting from the head cluster number of the recording-interrupted file, the file recovery unit 26 becomes incapable of detecting the sync byte 203 at the cluster number 1FFF (step S303). So, FFFF indicating the final cluster of the data file is stored in the position of the cluster number 1FFF on the file allocation table 102 (step S304). In the root directory 101, the cluster number 2000 following the cluster number 1FFF which has been recorded most recently is stored in the head cluster number storage area of the Free Area indicating the recordable area, instead of FFFF indicating that recording is continued (step S306). Thereby, the recording-interrupted file is restored to the file structure shown in figure 2(c) as in the case where recording is normally ended.

As described above, in the method and apparatus for recording/reproducing digital data according to the second embodiment, recording of digital data is performed using the disk recording medium 23 having the file structure in which all of the clusters in the recordable area are connected in advance. Therefore, even when an abend such as a power failure occurs during recording of digital data, the data which has been recorded from the start of recording to the abend can be reproduced when power is restored. Further, by making good use of the Free Area as the recordable area, the recordable area can be restored to the same file format as that of a file for which

the data-recording end process is normally performed.

While in this second embodiment a transport packet is described as a digital data format for recording, the same processing as described above can be performed on pack data by utilizing a pack start code as a sync byte.

Further, while in this second embodiment the head cluster number of the interrupted file is obtained by checking whether there is a dropout of sync byte, it may be obtained on the basis of other format information of digital data.

### **Embodiment 3.**

Hereinafter, a method and an apparatus for recording/reproducing digital data according to a third embodiment of the invention will be described with reference to the drawings. In the digital data recording/reproduction method according to this third embodiment, the step of checking whether there is a dropout of sync byte in the cluster according to the second embodiment is replaced with a step of checking whether there is a dropout of marker bit or a decrease in PTS in the cluster.

The file structure of the disk recording medium and the digital data recording/reproduction apparatus according to this third embodiment are shown in figures 2(a)-2(c) and figure 4, respectively, that is, the file structure and the apparatus are identical to those of the second embodiment, and therefore, repeated description is not necessary. In this third embodiment,



FFFF, which is stored in the head cluster number storage area of the Free Area (the recordable area) shown in figure 2(b), indicates that data recording is continued. Further, in this third embodiment, the file recovery unit 26 shown in figure 4 performs file recovery when it detects a dropout of marker bit or a decrease in PTS.

Figure 7 is a diagram for explaining a data format of PES data which is obtained by collecting payload sections of transport packets shown in figure 5.

The PES data is composed of a packet header 401 as an information area of PES, and packet data 402 as actual data. The packet header 401 includes a PTS 403 as time control information for reproduced output data, and the PTS 403 increments in value according to the data. The PTS 403 includes marker bits 404 which always take on "1".

Next, a description will be given of the file recovery process upon restoration of power, in the case where an abend such as a power failure occurs during data recording.

Figure 8 is a flowchart illustrating the file recovery process upon restoration of power. In figure 8, steps S501 and S502 and steps S503 to S508 are identical to steps S301 and S302 and steps S303 to S308 of the flowchart of the second embodiment shown in figure 6, respectively, and therefore repeated description is not necessary. Further, the process is performed by the file recovery unit 26 unless otherwise specified.

In step S503, it is checked whether there is a dropout of marker bit 404 or a decrease in PTS 403 in the current cluster. When there is a dropout of marker bit 404 or a decrease in PTS 403, it is decided that recording is interrupted in the current cluster, followed by step S504. When there is neither a dropout of marker bit 404 nor a decrease in PTS 403, it is decided that recording is not interrupted in the current cluster, followed by step S507.

Next, the file recovery process upon restoration of power will be described using an example.

It is assumed that a power failure occurs during recording of data in the cluster 103 having the cluster number 1FFF. In this case, when the file recovery unit 26 checks whether the PTS 403 is normal or not, starting from the head cluster number of the recording-interrupted file, the file recovery unit 26 detects that the PTS 403 is not normal at the cluster number 1FFF (step S503). So, FFFF indicating the final cluster of the data file is stored in the position of the cluster number 1FFF on the file allocation table 102 (step S504). In the root directory 101, the cluster number 2000 following the cluster number 1FFF which has been recorded most recently is stored in the head cluster number storage area of the Free Area indicating the recordable area, instead of FFFF indicating that recording is continued (step S506). Thereby, the recording-interrupted file is restored to the file structure shown in figure 2(c) as in the case where

00502T "BTSE/950

recording is normally ended.

As described above, in the method and apparatus for recording/reproducing digital data according to the third embodiment, recording of digital data is performed using the disk recording medium having the file structure in which all of the clusters in the recordable area are connected in advance. Therefore, even when an abend such as a power failure occurs during recording of digital data, the data which has been recorded from the start of recording to the abend can be reproduced when power is restored. Moreover, by making good use of the Free Area as the recordable area, the recordable area can be restored to the same file format as that of a file for which the data-recording end process is normally performed.

While in this third embodiment a transport packet is described as a digital data format for recording, the same processing as described above can be performed on pack data by utilizing a pack start code as a sync byte.

Further, while in the second and third embodiments FFFF is employed as an identifier indicating that recording is continued, any other value may be used as long as it is not used as a cluster number.

#### **Embodiment 4.**

Hereinafter, a method and an apparatus for recording/reproducing digital data according to a fourth embodiment of the present invention will be described with

The digital data recording/reproduction apparatus according to this fourth embodiment is identical to that according to the second embodiment shown in figure 4.

In figure 9, the recording area of the disk recording medium 23 is composed of a root directory 601, a file allocation table 602, and clusters 603. The root directory 601 holds the title of a file stored in the disk recording medium 23, and the head cluster number where data of this file is stored. The file allocation table 602 manages the connection of the clusters 603 by storing, in the position of the current cluster number, a cluster number which follows the current cluster number. Each cluster 603 is the smallest access unit of the disk recording medium 23, and continuous numbers are assigned as logical block addresses to the respective clusters 603. The digital data of the data file is stored in the clusters 603.

When recording data, the file name and the head cluster number are entered in the root directory 601, and the data is recorded in each cluster 603 while updating the connection

Next, the data structure of the cluster 603 will be described with reference to figure 10.

In figure 10, one cluster 603 is composed of recording information 701 where information at recording of digital data is stored, and digital data 702 as actual data. The recording information 701 is composed of a file ID 703 for identifying a data file, and a connecting cluster number 704 where a cluster number following this cluster is stored. This fourth embodiment employs, as the file ID 703, the recording start time (year, month, hour, minute, second) represented by ASCII code.

Figure 11(a) shows the state of the file structure in the case where an abend such as a power failure occurs when a data file Videol is being recorded in the cluster 603 of the cluster number 0004, i.e., before updation of the file allocation table 602.

Initially, in step S901, it is decided whether recording is interrupted or not, by checking the cluster connection information on the file allocation table 802 starting from the head cluster number of the data file Video1 in the root directory 801 shown in figure 11(a). When recording is not interrupted, i.e., when the cluster connection on the file allocation table 802 is in the normal state, the power restoration process is ended. On the other hand, when recording is interrupted, the

operation proceeds to step S902.

In step S902, the head cluster number of the recording-interrupted file is obtained as a current cluster from the root directory 801, and the file ID804 of the head cluster is regarded as a target file ID.

In step S903, the connecting cluster number 805 of the current cluster 803 is obtained as a next cluster.

In step S904, when the file ID 804 of the next cluster is different from the target file ID, it is decided that recording is interrupted in the current cluster, followed by step S905. On the other hand, when the file ID804 of the next cluster is identical to the target file ID, it is decided that data recording is not interrupted in the current cluster, followed by step S906.

In step S905, FFFF indicating the final cluster is stored in the position of the cluster number corresponding to the current cluster on the file allocation table 802. Then, the power restoration process is ended.

In step S906, the number of the next cluster is stored in the position of the current cluster on the file allocation table 802 to restore the cluster connection, and the current cluster is updated to the value of the next cluster, followed by step S903. Thereafter, check of the file ID 804 (steps S903 and S904) is repeated.

Next, the file recovery process upon restoration of power

will be described using an example.

It is assumed that a power failure occurs during recording of data in the cluster 803 having the cluster number 0004. In this case, when the file recovery unit 26 checks whether the current cluster and the next cluster have the same file ID, starting from the head cluster 0002 of the data file Videol, the file recovery unit 26 detects that the current cluster and the next cluster have different file IDs when the current cluster has the cluster number 0004 (step S904). So, FFFF indicating the final cluster of the data file is stored in the position of the cluster number 0004 on the file allocation table 802 (step S905). Thereby, the data file Videol is restored to a recorded file shown in figure 9 as in the case where recording is normally ended.

As described above, in the method and apparatus for recording/reproducing digital data according to the fourth embodiment, since the file ID for identifying the data file and the connecting cluster number indicating the cluster connection are stored in each cluster, even when an abend occurs during recording of digital data, the file allocation table 602 of the data file which has been recorded from the start of recording to the abend can be restored when power is restored, whereby the reproducible part can be restored in a file format.

While in this fourth embodiment the recording start time (year, month, hour, minute, second) is used as a file ID, a counter having no repeatability may be used.



Further, while in the first to fourth embodiments the recordable area is described as all of the clusters, the recordable area may be assigned to some of the clusters while using the remaining clusters as a recording area for computer data.

Embodiment 5.

The digital data recording/reproduction apparatus according to this fifth embodiment can deal with an event such as a power failure which occurs during recording of a fee-charged broadcast, using the digital data recording/reproduction method according to any of the second to fourth embodiments.

Figure 13(a) is a diagram illustrating the structure of the digital data recording/reproduction apparatus according to the fifth embodiment.

With reference to figure 13(a), the digital data recording/reproduction apparatus comprises a digital broadcast receiver 1001, a decoder 1002, a digital data recording/reproduction controller 1003, a disk storage unit 1005, and a data destination switch 1006. The digital data recording/reproduction controller 1003 comprises a data I/O unit 21, a file structure management unit 25, and a controller 27. Further, the file structure management unit 25 is provided with a file recovery unit 26. The data I/O unit 21, the file structure management unit 25, and the file recovery unit 26 operate in the same way as described for any of the second to fourth embodiments and, therefore, repeated description is not necessary.

The digital broadcast receiver 1001 receives a digital broadcast 10A, extracts copy protection information, and performs demultiplexing to extract a program designated by the user. Further, the receiver 1001 performs descrambling on the basis of the copy protection information if necessary, and extracts digital data 10B. The digital data 10B of the program extracted by the digital broadcast receiver 1001 is output to the digital data recording/reproduction controller 1003.

The decoder 1002 receives the digital data 10B from the digital data recording/reproduction controller 1003, decodes the digital data 10B to convert it to analog data, and outputs video and audio.

The controller 27 of the digital recording/reproduction

controller 1003 records accounting information 10D in a master card 1004. When the data destination switch 1006 designates only reproduction or both of reproduction and recording, the controller 27 instructs the file structure management unit 25 to output the digital data 10B to the decoder 1002. When the data destination switch 1006 designates only recording or both of reproduction and recording, the controller 27 instructs the file structure management unit 25 to record the digital data 10B in the disk storage unit 1005 by a digital data recording/reproduction method according to any of the second to fourth embodiments.

When the file recovery unit 26 detects that data recording is abnormally ended due to a power failure or the like after power-ON, the controller 27 instructs the file structure management unit 25 to delete the file which has been recorded in the disk storage unit 1005 until the abend, and deletes the program from the fee-charged broadcast accounting information 10D.

The accounting information 10D is recorded in the master card 1004.

In the disk storage unit 1005, the digital data 10B is recorded in a file format according to any of the second to fourth embodiments.

When the user designates, as the destination of the received data, one of the following application modes: only reproduction, only recording, and both of reproduction and recording, the data

destination switch 1006 outputs a signal 10C designating the application mode to the digital data recording/reproduction controller 1003.

Figure 13(b) is a diagram for explaining the format of accounting information recorded in the master card 1004.

In figure 13(b), the accounting information format is composed of a charge-for-broadcast 1007 indicating the charge per view, a view mode 1008 for identifying whether the broadcast is reproduced or recorded when being viewed, and a program file 1009 indicating the name of a file when the received broadcast is recorded in the disk storage unit 1005.

Next, the operation of the digital data recording/reproduction apparatus will be described.

First of all, a description will be given of the case where the received digital broadcast 10A is reproduced or recorded.

Before receiving the broadcast, the user of the digital data recording/reproduction apparatus selects a data output mode, i.e., one of "both of reproduction and recording", "only reproduction", and "only recording", and sets it in the data destination switch 1006.

The digital broadcast transmitted from the broadcast station is input to the digital broadcast receiver 1001. The digital broadcast receiver 1001 takes the copy protection information out of the digital broadcast, and performs demultiplexing to extract the program designated by the user. Further, the receiver 1001

performs descrambling on the basis of the copy protection information if required, extracts the digital data 10B, and outputs it to the digital data recording/reproduction controller 1003.

The digital data recording/reproduction controller 1003 records the accounting information 10D in the master card 1004. When the designation of the data destination switch 1006 includes reproduction, the controller 1003 outputs the digital data 10B to the decoder 1002. When the designation of the data destination switch 1006 includes recording, the controller 1003 stores the digital data 10B in the disk storage unit 1005.

When the digital data 10B is output to the decoder 1002, the decoder 1002 decodes the digital data 10B to convert it to analog data, and outputs video and audio.

Recording of the digital data 10B in the disk storage unit 1005 is performed using a digital data recording/reproduction method according to any of the first to fourth embodiments.

Next, a description will be given of the operation for reproducing the data recorded in the disk storage unit 1005.

When reproducing the data from the disk storage unit 1005, the digital data recording/reproduction controller 1003 reads the digital data 10B from the disk storage unit 1005, and transmits it to the decoder 1002, whereby analog data is reproduced.

Next, a description will be given of the operation of the digital data recording/reproduction controller 1003 in the case

where an abend such as a power failure occurs during recording of a fee-charged broadcast program, with reference to figure 14.

Figure 14 is a flowchart illustrating the process performed by the digital data recording/reproduction controller 1003 in the case where an abend such as a power failure occurs during recording of a fee-charged broadcast program.

Initially, in step S111, the file recovery unit 26 checks whether data recording is abnormally ended or not, by a digital data recording/reproduction method according to any of the second to fourth embodiments. When recording is not interrupted, the power restoration process is ended. When, recording is interrupted, the operation proceeds to step S112.

In step S112, the file structure management unit 25 obtains the name of the data file which has been recorded in the disk storage unit 1005 until the abend, and regards this file as an interrupted file.

In step S113, the controller 27 checks whether the interrupted file matches any of the program files 1009 in the fee-charged broadcast accounting information. When there is no program file matching the interrupted file, the controller 27 decides that a free-of-charge broadcast has been recorded, and goes to step S114. When there is a program file matching the interrupted file, the operation proceeds to step S115.

In step S114, the file recovery unit 26 restores the recording-interrupted file using a digital data

recording/reproduction method according to any of the second to fourth embodiments. Then, the power restoration process is ended.

In step S115, the controller 27 checks the view mode 1008 stored in the master card 1004. When the view mode 1008 is "only recording", the operation proceeds to step S116. In step S116, the controller 27 instructs the file structure management unit 25 to delete the interrupted file from the disk storage unit 1005. Then, the file structure management unit 25 deletes the interrupted file from the disk storage unit. Thereafter, the operation proceeds to step S117 wherein the controller 27 deletes the corresponding program from the fee-charged broadcast accounting information to end the power restoration process.

When the view mode 1008 is "both of recording and reproduction", in step S118 the controller 27 instructs the file structure management unit 25 to delete the interrupted file from the disk storage unit 1005. Then, the file structure management unit 25 deletes the interrupted file from the disk storage unit 1005. Thereafter, the operation proceeds to step S119 wherein the charge for recording is subtracted from the charge-for-broadcast 1007. Then, the power restoration process is ended.

As described above, in the digital data recording/reproduction apparatus according to this fifth embodiment, a digital broadcast is recorded using a file structure according to any of the second to fourth embodiments. Therefore, even when an abend such as a power failure occurs during data recording, the

file until interruption due to the abend can be restored if the digital broadcast is free of charge. Further, even when recording of a fee-charged broadcast is interrupted due to an abend, no accounting is performed on this broadcast by discarding the data which has been recorded until the interruption. Thus, proper accounting for the user is performed.

While in this fifth embodiment the recorded data is unconditionally discarded when an abend occurs during recording of a fee-charge broadcast program, the user may decide whether the data which has been recorded until the abend is saved or discarded.

#### **Embodiment 6.**

Hereinafter, a digital data recording/reproduction apparatus according to a sixth embodiment of the present invention will be described with reference to the drawings.

The digital recording/reproduction apparatus according to the sixth embodiment is provided with a plurality of disk storage units, and a cluster where digital data is stored and a file allocation table showing information about connection of the cluster are recorded in different disk storage units, whereby the load is reduced as compared with the case of using a single disk storage unit, resulting in high-speed disk access.

Figure 15 is a diagram illustrating the structure of the digital data recording/reproduction apparatus according to the sixth embodiment.



The digital data recording/reproduction apparatus is provided with a data I/O unit 1201, a file structure management unit 1202, a disk storage unit A 1203, and a disk storage unit B 1204.

When receiving digital data, the data I/O unit 1202 receives digital data from a digital data input device which is externally connected, and outputs the data to the file structure management unit 1202. When reproducing the digital data, the data I/O unit 1201 receives the data from the file structure management unit 1202, and outputs it to a digital data reproduction device which is externally connected.

On receipt of the digital data, the file structure management unit 1202 records the digital data in the disk storage unit A 1203 and the disk storage unit B 1204. When outputting the digital data, the file structure management unit 1202 reads the digital data from the disk storage unit A 1203 and the disk storage unit B 1204.

The digital data is recorded in the disk storage unit A 1203 and the disk storage unit B 1204. The file structure employed in the disk storage unit A 1203 and the disk storage unit B 1204 is identical to the file structure according to the fourth embodiment shown in figure 9.

Next, a description will be given of the operation of recording digital data in the disk storage unit A 1203 and the disk storage unit B 1204.

When recording digital data, the file name and the head cluster number are entered in the root directory 601, and digital data is recorded in the respective clusters 603 while updating the cluster connection information on the file allocation table 602.

With reference to figure 15, the root directory 601 and the file allocation table 602 corresponding to the cluster B in the disk storage unit B 1204 are stored in the storage area for the root directory 601 and the file allocation table 602 in the disk storage unit A 1203 which is different from the disk storage unit B 1204 where the cluster B is stored. The root directory 601 and the file allocation table 602 corresponding to the cluster A in the disk storage unit A 1203 are stored in the storage area for the root directory 601 and the file allocation table 602 in the disk storage unit B 1204 which is different from the disk storage unit A 1203 where the cluster A is stored.

As described above, according to the digital data recording/reproduction method of this sixth embodiment, since a cluster containing digital data and a file allocation table showing information about connection of this cluster are recorded in different disk storage units, high-speed disk access is achieved. Further, even when an abend such as a power failure occurs during recording of digital data, the data which has been recorded from the start of recording to the abend can be read in a normal file format when power is restored.

While in this sixth embodiment also the root directory is stored in the disk storage unit which is different from the disk storage unit where the corresponding cluster is stored, the root directory and the cluster may be stored in the same disk storage unit as long as the cluster and the file allocation table are stored in different disk storage units.

Further, while in this sixth embodiment two disk storage units are used, three or more disk storage units may be used as long as the cluster and the file allocation table are stored in difference disk storage units.

Furthermore, the file structure of the disk storage unit A 1203 and the disk storage unit B 1204 may be the conventional one shown in figure 17.

While in the first to sixth embodiments the data I/O unit 21 or 1201 performs both of data input and data output, it may be separated into a data input unit and a data output unit.

Further, in the digital data recording/reproduction apparatuses according to the first to sixth embodiments, the file structure management units 22 and 25, the file recovery unit 26, and the controller 27 are implemented by either hardware or software.

Furthermore, "digital data" described in the first to sixth embodiment means either or both of video data and audio data.

Moreover, in the first to fourth and sixth embodiments, analog data may be encoded to digital data in advance of

recording to record the analog data as digital data by a digital data recording/reproduction method.

#### APPLICABILITY IN INDUSTRY

As described above, the method and apparatus for recording/reproducing digital data according to the present invention perform recording or reproduction of video data, or audio data, or both of them, and are suited to data recording in the case where an abend such as a power failure occurs during data recording.

009021 120600 09673518

1. A digital data recording/reproduction method for recording and reproducing digital data in units of clusters, each cluster being the smallest unit of data recording on a disk recording medium, said method comprising:

second step of recording digital data from the head of the recordable clusters; and

2. A digital data recording/reproduction method as defined in Claim 1, further comprising the steps of:

when an abend occurs during data recording in the second step,  
detecting the abend of data recording after recovery from the  
abend; and

constituting, as a recorded file, the digital data which has been recorded from the start of data recording to the abend, on the basis of format information of the digital data.

3. A digital data recording/reproduction method as defined in Claim 2, wherein the format information of the digital data is a sync byte of a transport packet.

4. A digital data recording/reproduction method as defined in Claim 2, wherein the format information of the digital data is time information.

5. A digital data recording/reproduction method for recording and reproducing digital data in units of clusters, each cluster being the smallest unit of data recording on a digital recording medium, comprising the steps of:

recording digital data in the clusters, with a file identifier and cluster connection information being added to the digital data;

when an abend occurs during data recording, detecting the abend of data recording after recovery from the abend; and

restoring the cluster connection information on the basis of the file identifier and the cluster connection information which are recorded in the clusters.

6. A digital data recording/reproduction apparatus comprising:

a disk recording medium in which digital data is stored in units of clusters, each cluster being the smallest unit of data recording; and

a file structure management unit for storing the digital data in the disk recording medium or reading the digital data from the disk recording medium;

00673548-120600

7. A digital data recording/reproduction apparatus as defined in Claim 6, wherein said file structure management unit has a file recovery unit, and when an abend occurs during recording of digital data, the file recovery unit constitutes, as recorded data, the digital data which has been recorded from the start of data recording to the abend, on the basis of format information of the digital data, after recovery from the abend.

9. A digital data recording/reproduction apparatus as defined in Claim 7, wherein said format information is time information.

a file structure management unit for storing digital data in the clusters of the disk recording medium, with a file identifier and cluster connection information being added to the clusters,

or reading the digital data from the disk recording medium;

wherein said file structure management unit has a file recovery unit, and when an abend occurs during recording of digital data, the file recovery unit constitutes, as recorded data, the digital data which has been recorded from the start of data recording to the abend, on the basis of the file identifier and the cluster connection information which are recorded in the clusters, after recovery from the abend.

11. A digital data recording/reproduction apparatus as defined in any of Claims 7 to 10, further comprising:

a digital broadcast receiver for receiving a digital broadcast; and

a controller for controlling the file structure management unit, according to accounting information which indicates whether the received digital broadcast is a fee-charged one or not;

wherein, when an abend of data recording occurs during reception of a fee-charged digital broadcast, the controller discards the recorded data after recovery from the abend so that accounting is not performed on the digital broadcast.

12. A digital data recording/reproduction apparatus for recording and reproducing digital data, comprising:

a plurality of disk storage units in which digital data are recorded; and

0967518 12000





## ABSTRACT

An object of the present invention is to provide a method and an apparatus for recording and reproducing digital data, which are able to prevent destruction of file and loss of data when an abend such as a power failure occurs during recording or reproduction of digital data on a disk recording medium.

The present invention is provided with a file structure management unit 25 and a file recovery unit 26. The file structure management unit 25 records digital data in a disk recording medium having a file structure in which recordable clusters are connected. When an abend occurs during data recording, the file recovery unit 26 constitutes, as a recorded file, the digital data which has been recorded from the start of data recording to the abend, on the basis of format information of data, after recovery from the abend.

009021 "BEE" 350

Fig.1

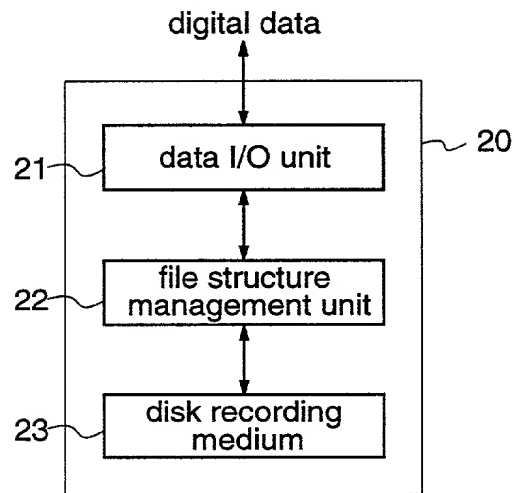


Fig.2(a)

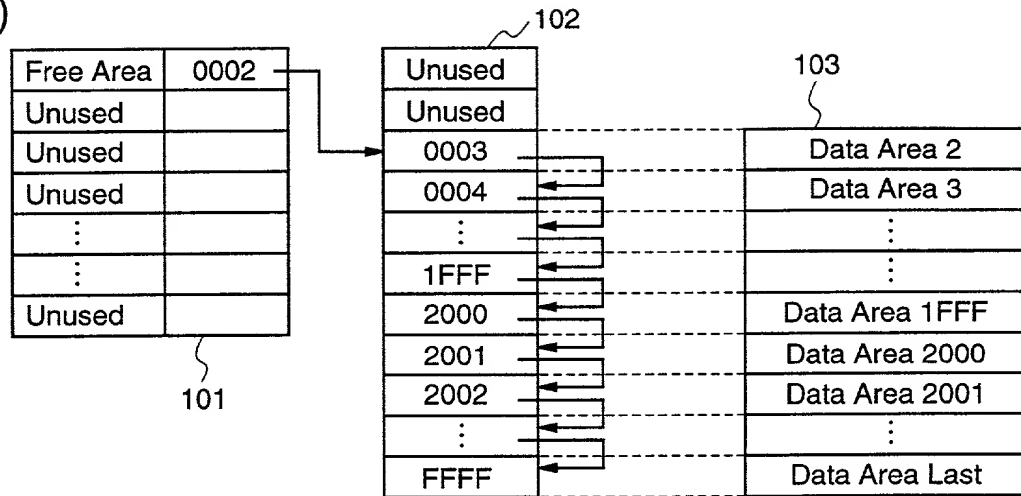


Fig.2(b)

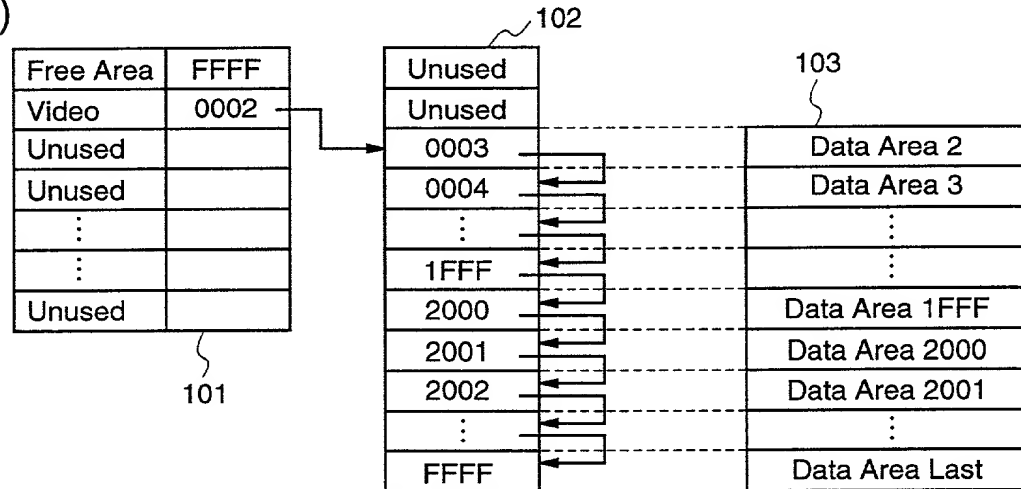


Fig.2(c)

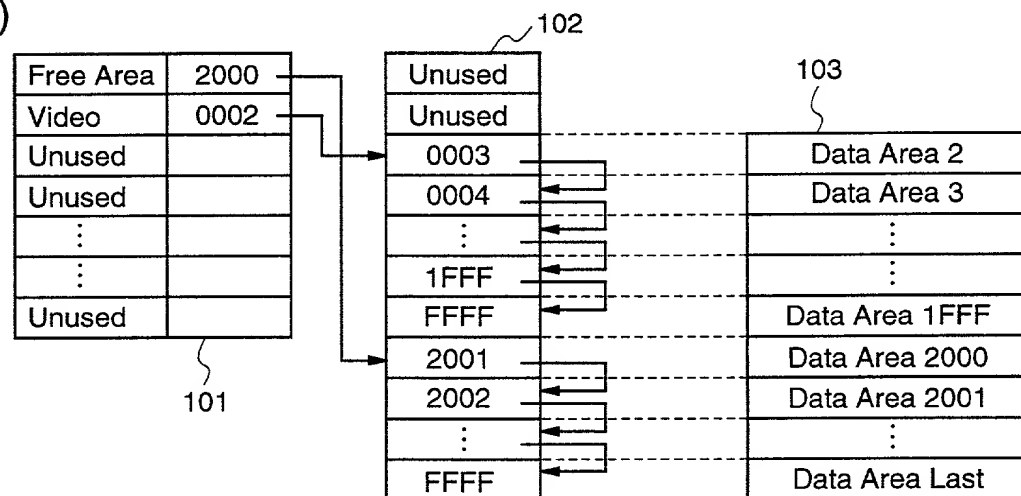


Fig.3

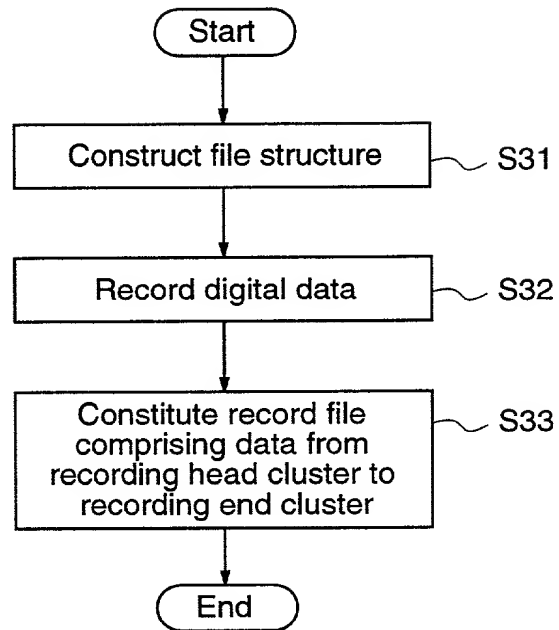


Fig.4

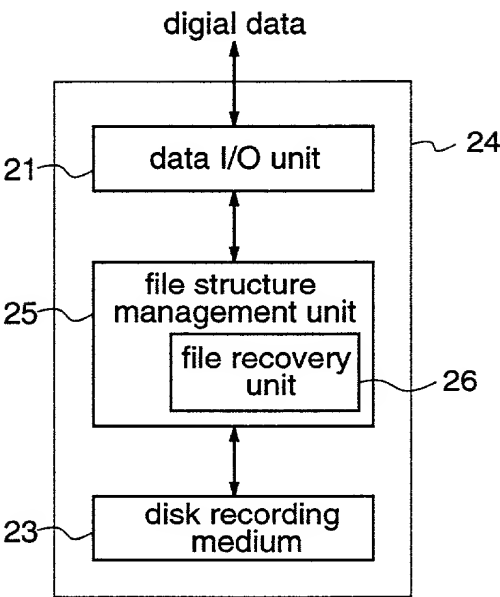


Fig.5

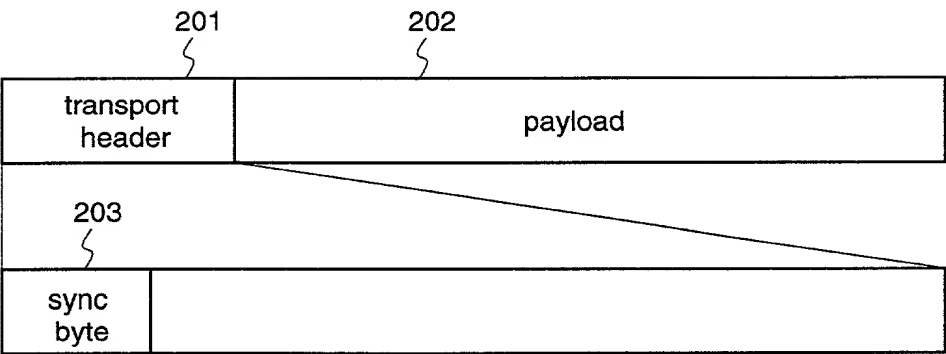


Fig.6


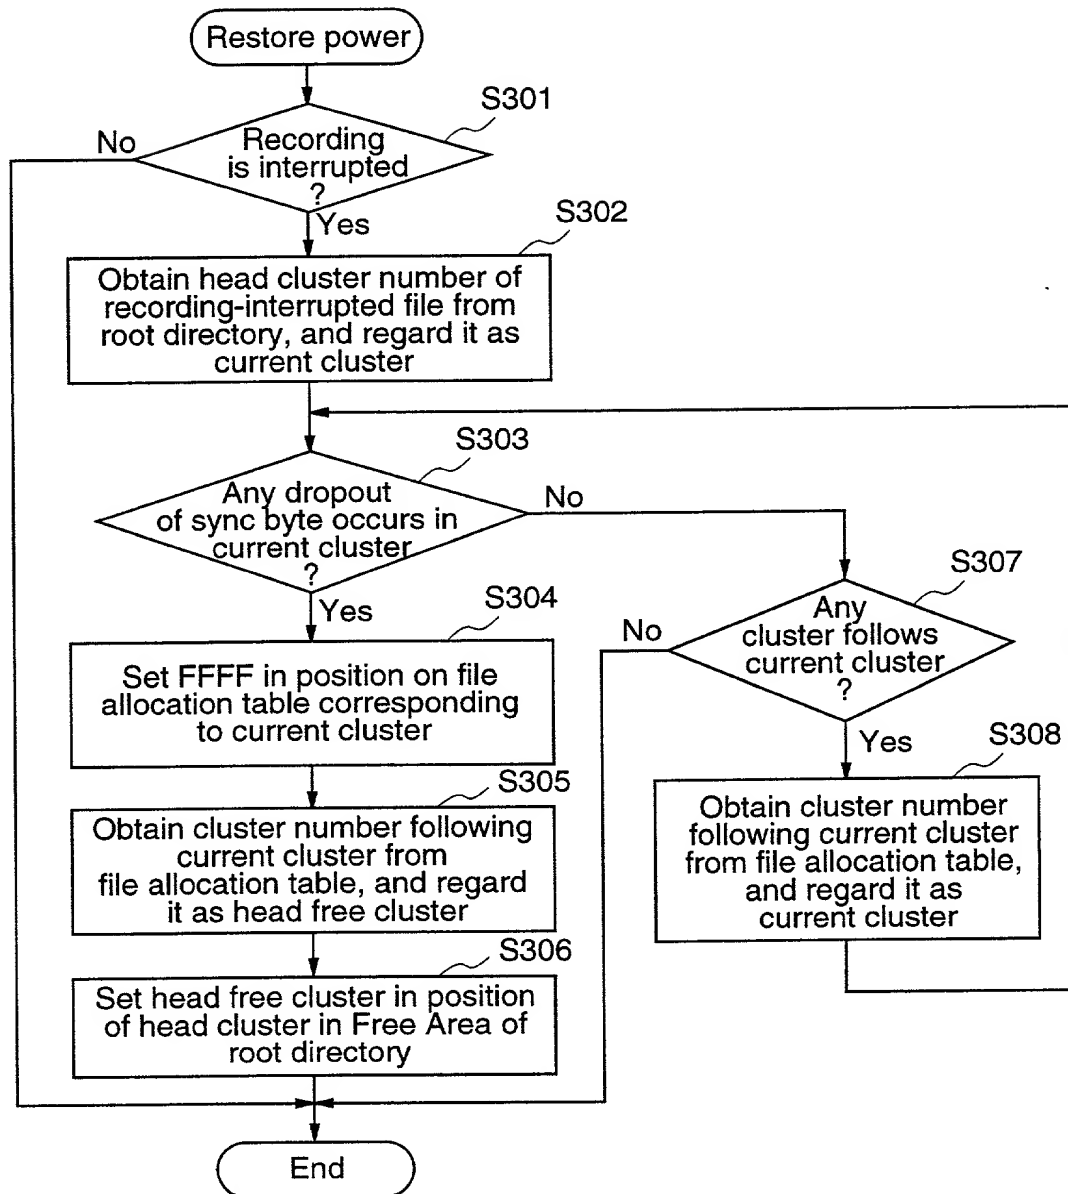


Fig.7



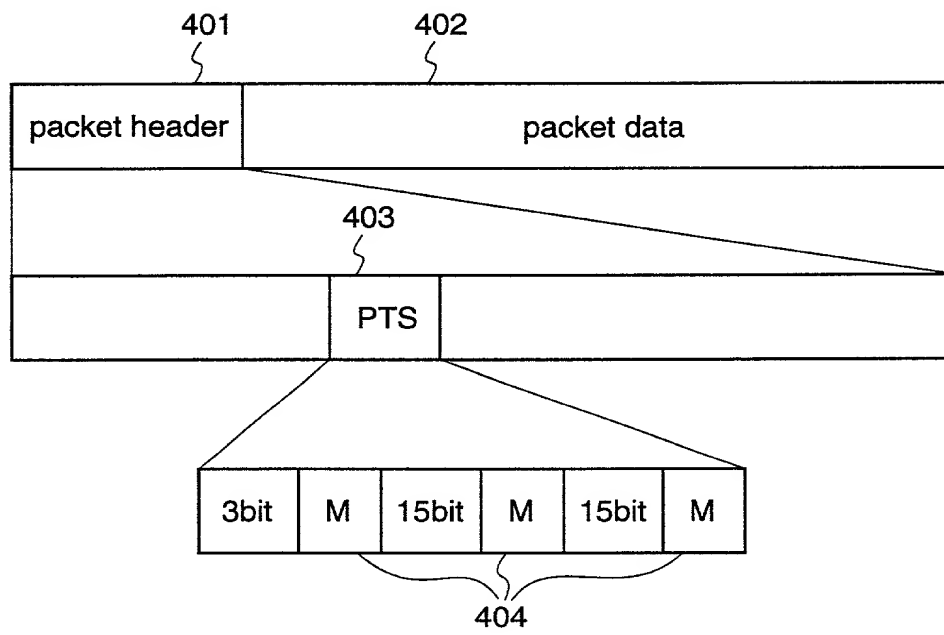

7/14

Fig.8

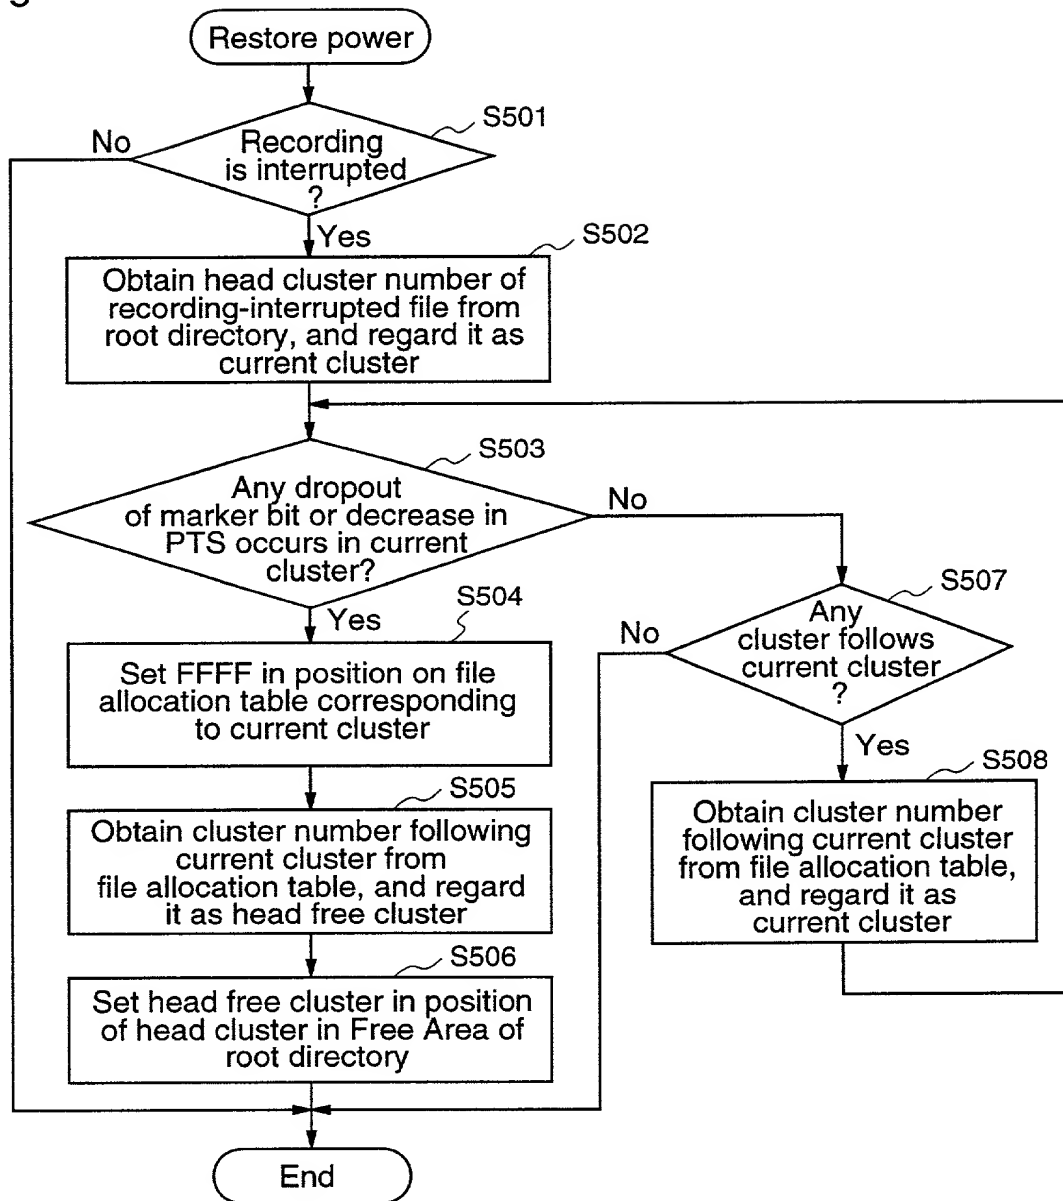


Fig.9

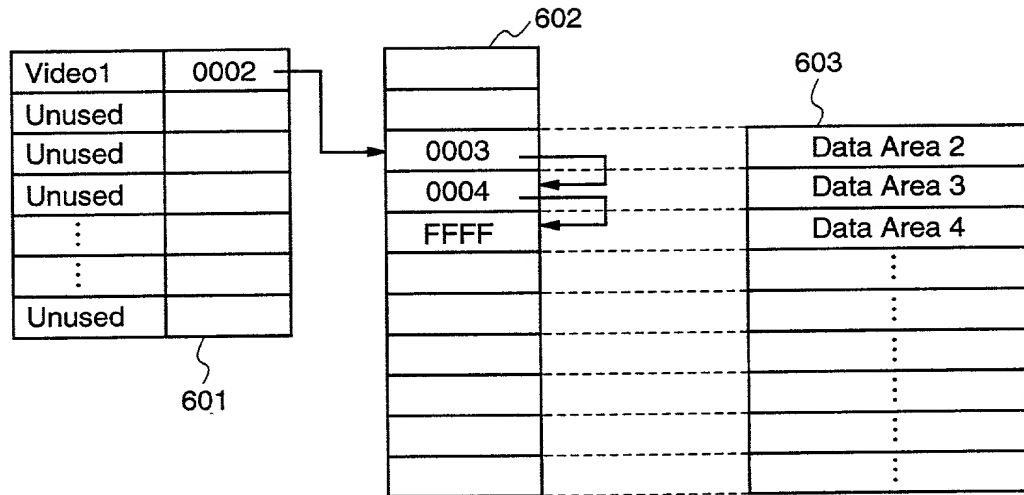


Fig.10

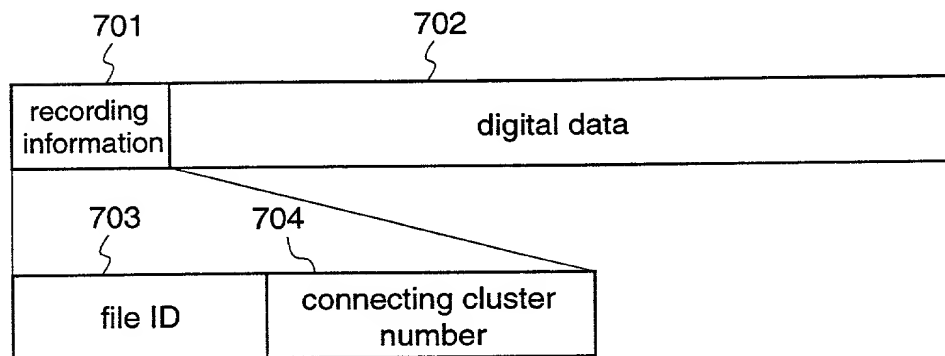


Fig.11(a)

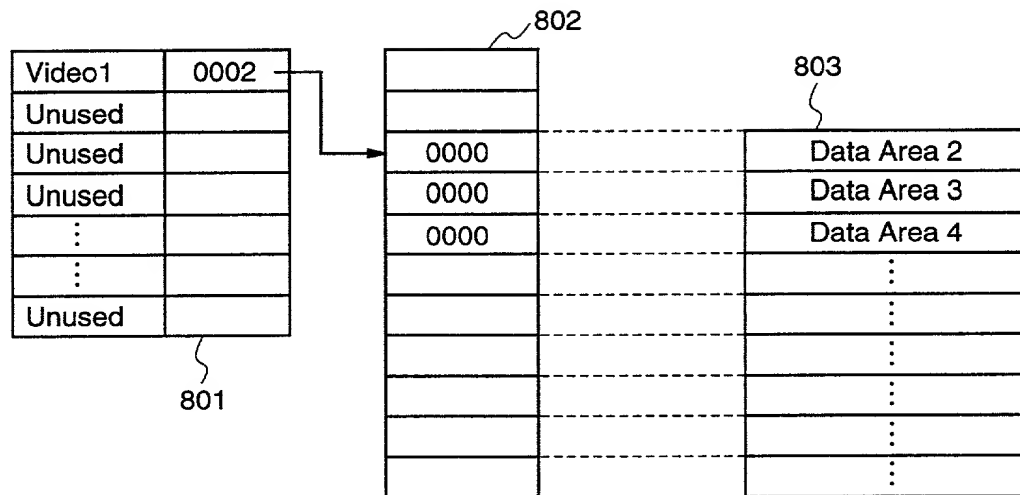


Fig.11(b)

	804	805	806
cluster 2	YYMMDDMMSS	0003	digital data
cluster 3	YYMMDDMMSS	0004	digital data
cluster 4	YYMMDDMMSS	undefined	digital data

Fig.12

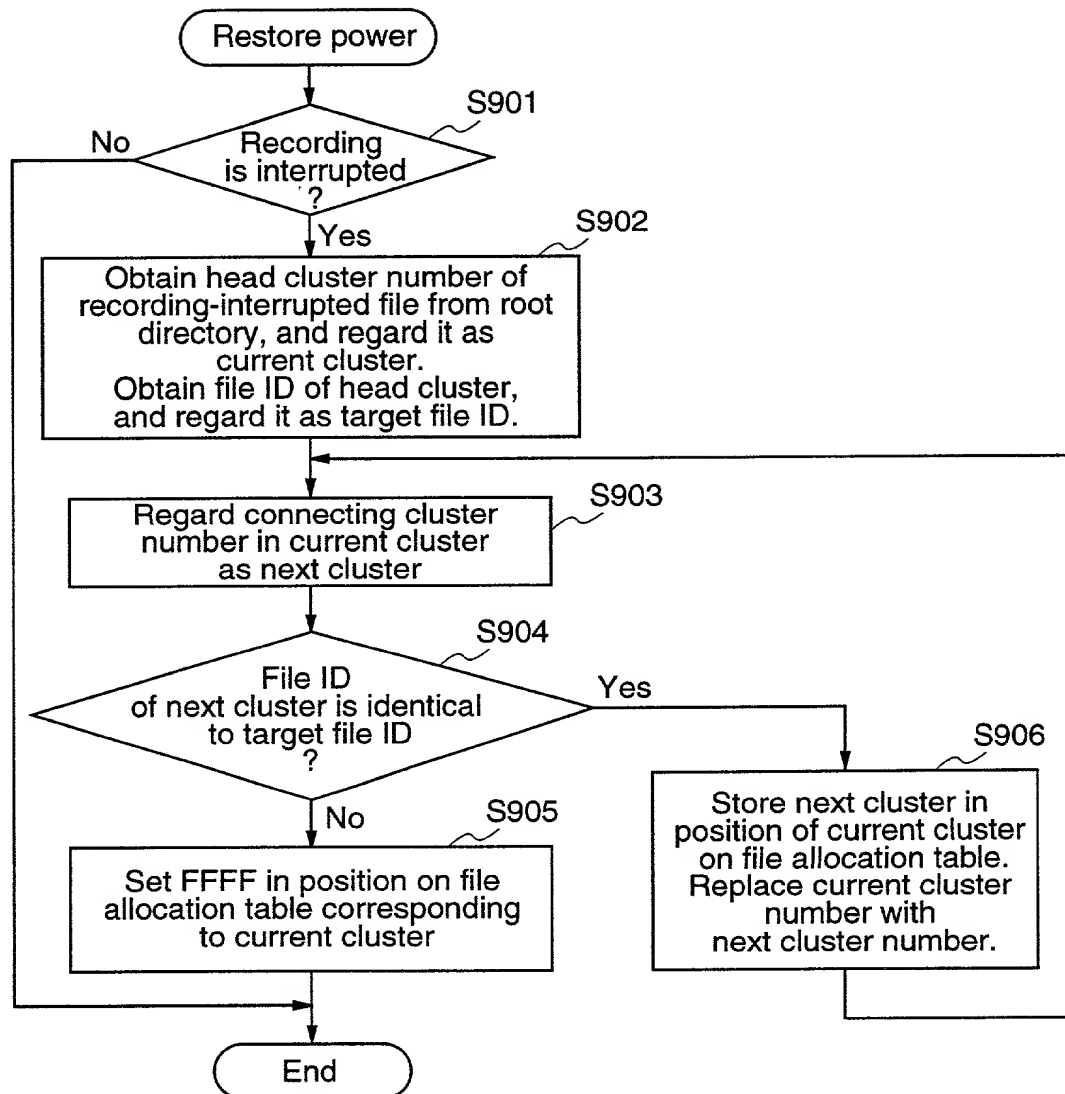


Fig.13(a)

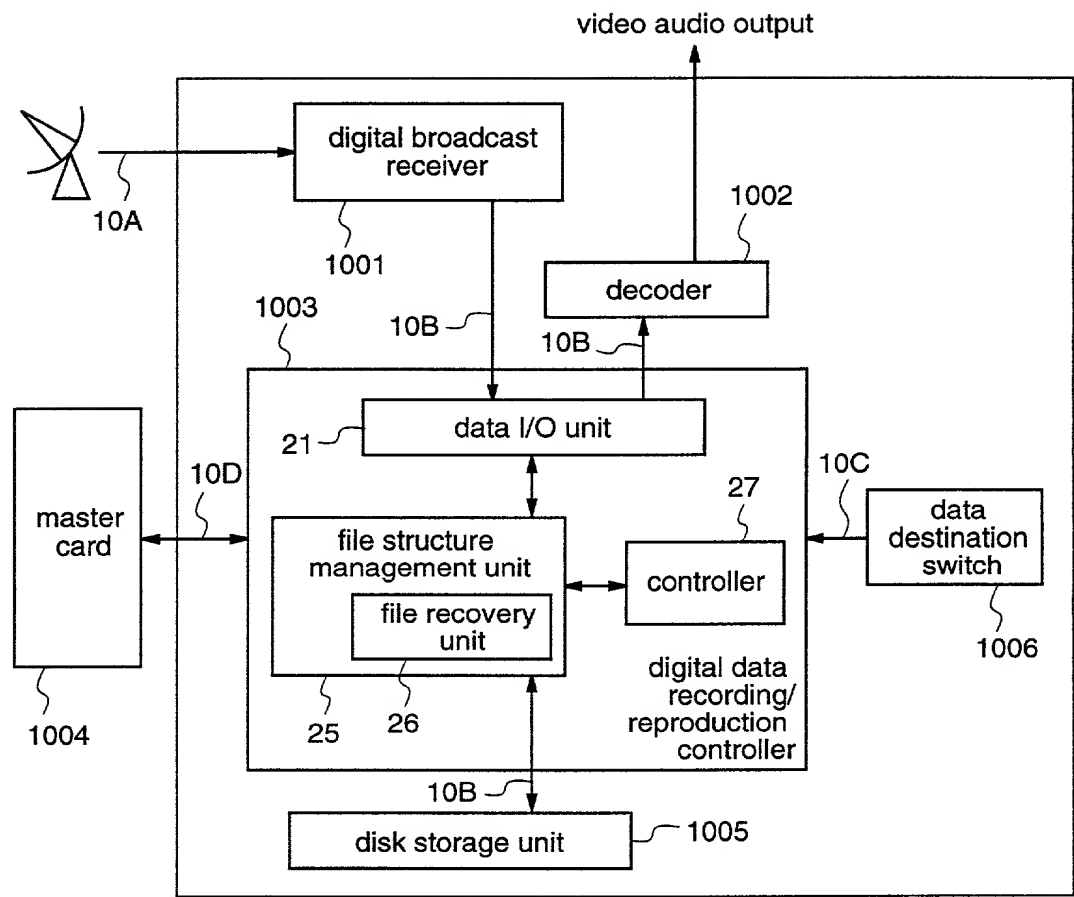


Fig.13(b)

1007	1008	1009
¥ 1000	recording & reproduction	fee-charged broadcast 1
¥ 0500	only reproduction	fee-charged broadcast 2
¥ 0800	only recording	fee-charged broadcast 3

12/14

Fig.14

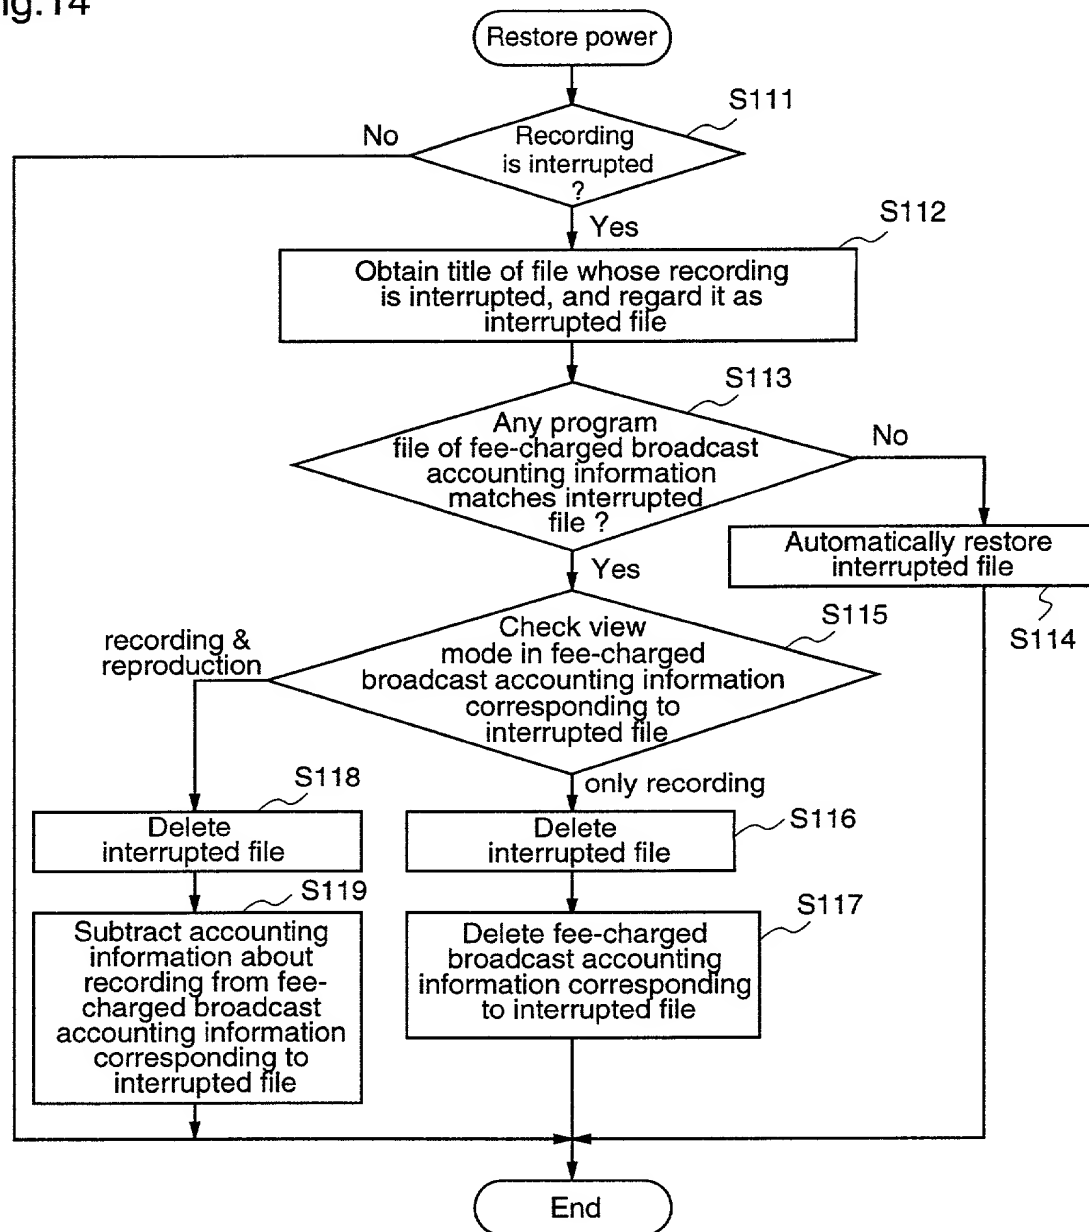


Fig.15

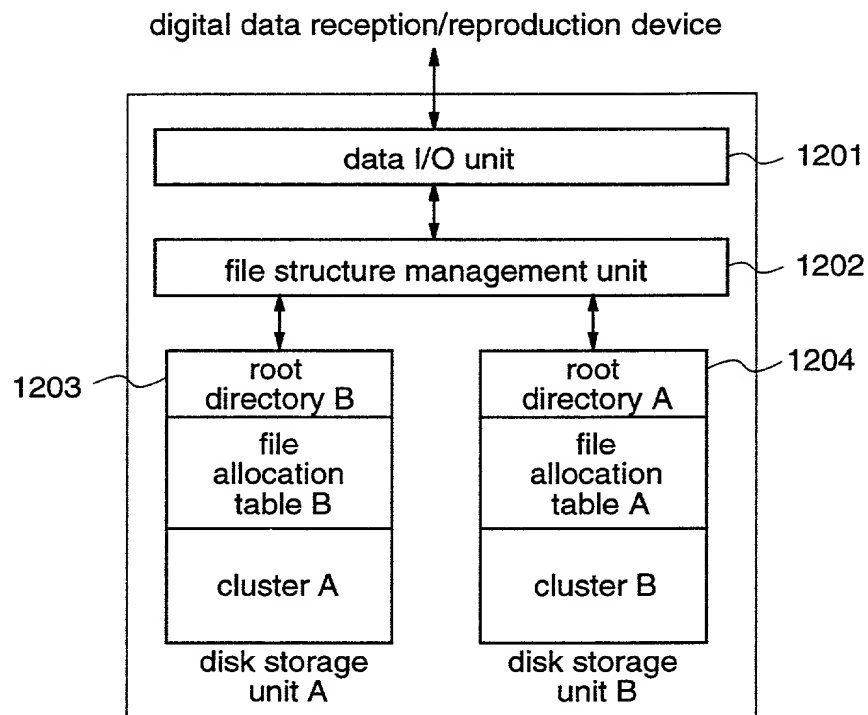


Fig.16


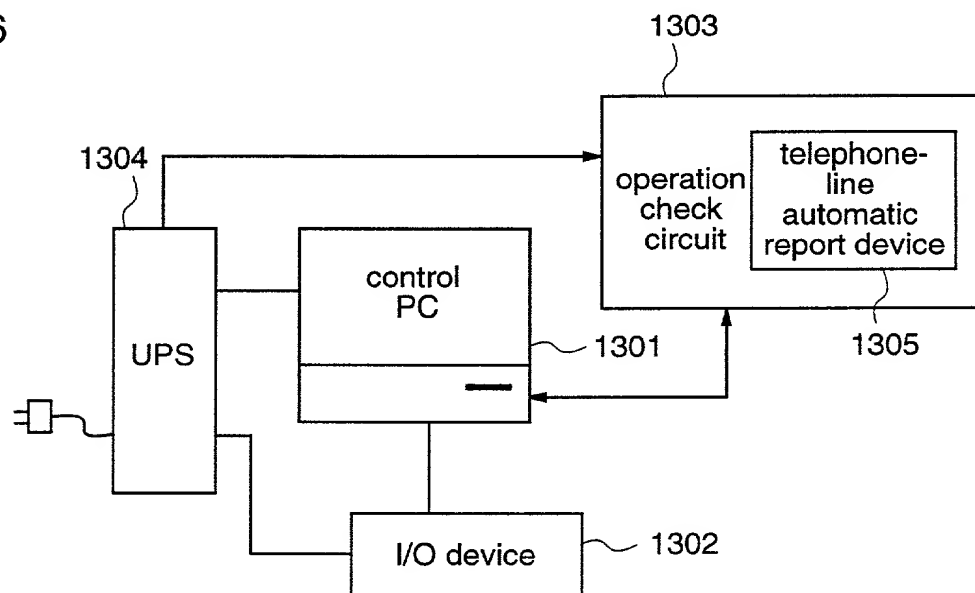


Fig.17



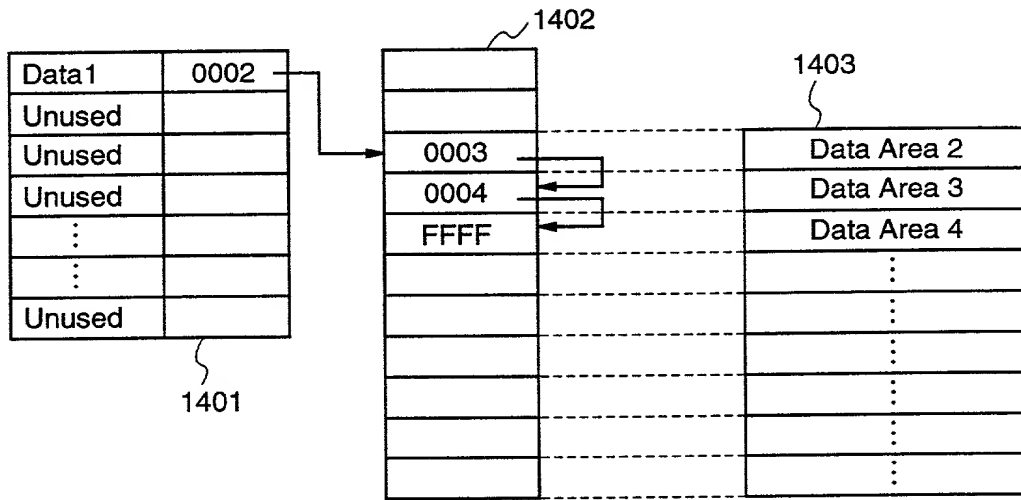

## DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(X) Original ( ) Supplemental ( ) Substitute (X) PCT ( ) DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: DIGITAL DATA RECORDING/REPRODUCTION METHOD, AND DIGITAL DATA RECORDING/REPRODUCTION APPARATUS

of which is described and claimed in:

- ( ) the attached specification, or  
 ( ) the specification in application Serial No. \_\_\_\_\_, filed October 17, 2000, and with amendments through \_\_\_\_\_ (if applicable), or  
 (X) the specification in International Application No. PCT/JP00/00843, filed February 16, 2000, and as amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
<u>Japan</u>	<u>Hei.11-39061</u>	<u>February 17, 1999</u>	<u>Yes</u>

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from HAYASE & CO. as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.  
2033 K Street, N.W., Suite 800  
Washington, D.C. 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.  
Area Code (202) 721-8200

Direct Facsimile Messages to:

Area Code (202) 721-8250

<b>Full Name of First Inventor</b>	FAMILY NAME TAKAHASHI	FIRST GIVEN NAME Masayuki	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY Ehime	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
<b>Post Office Address</b>	ADDRESS 456-3, Syu, Toyo-shi, Ehime	CITY 799-1371	STATE OR COUNTRY JAPAN
<b>Full Name of Second Inventor</b>	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
<b>Post Office Address</b>	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
<b>Full Name of Third Inventor</b>	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
<b>Post Office Address</b>	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
<b>Full Name of Fourth Inventor</b>	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
<b>Post Office Address</b>	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
<b>Full Name of Fifth Inventor</b>	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
<b>Post Office Address</b>	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
<b>Full Name of Sixth Inventor</b>	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
<b>Residence &amp; Citizenship</b>	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
<b>Post Office Address</b>	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Masayuki Takahashi Date Nov. 14, 2000  
Masayuki TAKAHASHI  
2nd Inventor \_\_\_\_\_ Date \_\_\_\_\_  
3rd Inventor \_\_\_\_\_ Date \_\_\_\_\_  
4th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
5th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
6th Inventor \_\_\_\_\_ Date \_\_\_\_\_

The above application may be more particularly identified as follows:

U.S. Application Serial No. \_\_\_\_\_ Filing Date October 17, 2000

Applicant Reference Number P-21610-01 Atty Docket No. 2000-1416A

Title of Invention DIGITAL DATA RECORDING/REPRODUCTION METHOD, AND DIGITAL DATA RECORDING/REPRODUCTION APPARATUS